


CMEY Series

Metallized Polyester Film Capacitors (Encapsulated)

TRIGON
COMPONENTS

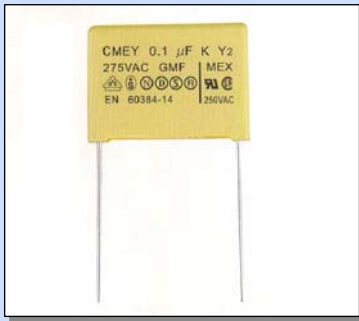

FEATURES

- Class Y2.
- Flame retardant plastic case and epoxy resin in compliance with UL 94V-0.
- Self-healing properties.
- Withstand
- Safety Approval: VDE & UL/CUL.
- RoHS Compliant.

ORDERING CODE


CMEY 223 J 27A L 100 T
(1) (2) (3) (4) (5) (6) (7)

- (1) Metallized Polyester Film Capacitor (Encapsulated)
- (2) Capacitance Code
- (3) Tolerance Code
- (4) Rated Voltage Code
- (5) Terminal Style Code
- (6) Lead-to-Lead Distance or Wire Length (Type A & B)
- (7) Package Code


※ Please refer to Complete Ordering Code document (CMEY-Ord) for more ordering options.

Configuration:

Type L

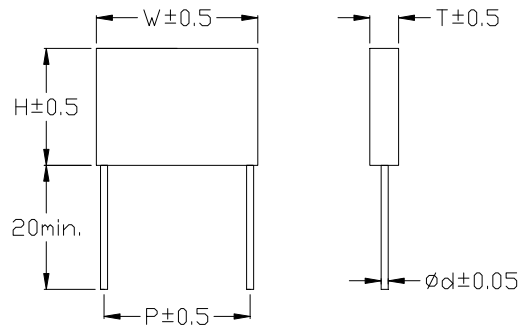

Type A & B

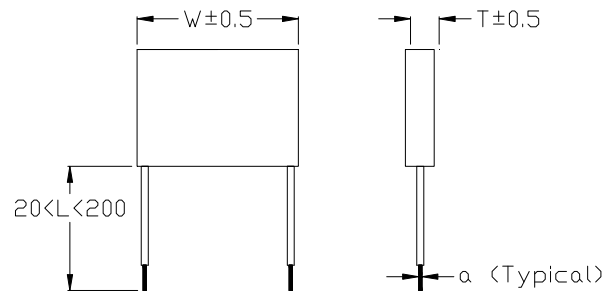

Casing is thermoplastic, sealed with synthetical resin.
Thermoplastic material is self-extinguishing according to UL94V-0.

Specification:

Item	Performance Characteristic
Operating Temperature	-40°C ~ +100°C
Rated Voltage	275VAC
Capacitance Range	0.001 μF ~ 0.1 μF
Dielectric Strength	400VDC for 1 sec.
Capacitance Tolerance	±10% (K) ±20% (M)
Dissipation Factor	0.1% Min. at 1KHz
Insulation Resistance	30,000MΩ Min. at 25°C

Capacitor

CMEY Series

Metallized Polyester Film Capacitors (Encapsulated)

TRIGON
COMPONENTS

Leads Options:

Terminals		
Type	Leads Length	Material
L	20mm Min. 3 to 6mm	Tinned Copper Wire
A	20 to 200mm	Insulated Stranded Wire, a=0.5mm ²
B	20 to 200mm	Insulated Stranded Wire, a=0.8mm ²
*	Custom terminal types available on request. Please contact agent for more details.	

Capacitor

Standard Values Table:

Capacitance (pF)	Dimensions				
	W	H	T	P	dφ
1,000	13.0	9.0	4.0	10.0	0.6
1,500	13.0	9.0	4.0	10.0	0.6
2,200	13.0	9.0	4.0	10.0	0.6
2,700	13.0	11.0	5.0	10.0	0.6
3,300	13.0	11.0	5.0	10.0	0.6
4,700	13.0	12.0	6.0	10.0	0.6
5,600	13.0	12.0	6.0	10.0	0.6
6,800	13.0	11.0	5.0	15.0	0.8
10,000	18.0	11.0	5.0	15.0	0.8
15,000	18.0	12.0	6.0	15.0	0.8
22,000	18.0	13.0	7.5	15.0	0.8
33,000	18.0	13.0	7.5	15.0	0.8
47,000	18.0	14.5	8.5	15.0	0.8
68,000	18.0	16.0	10.0	15.0	0.8
100,000	18.0	19.0	11.0	15.0	0.8

*Please contact agent for special values or size not listed.